

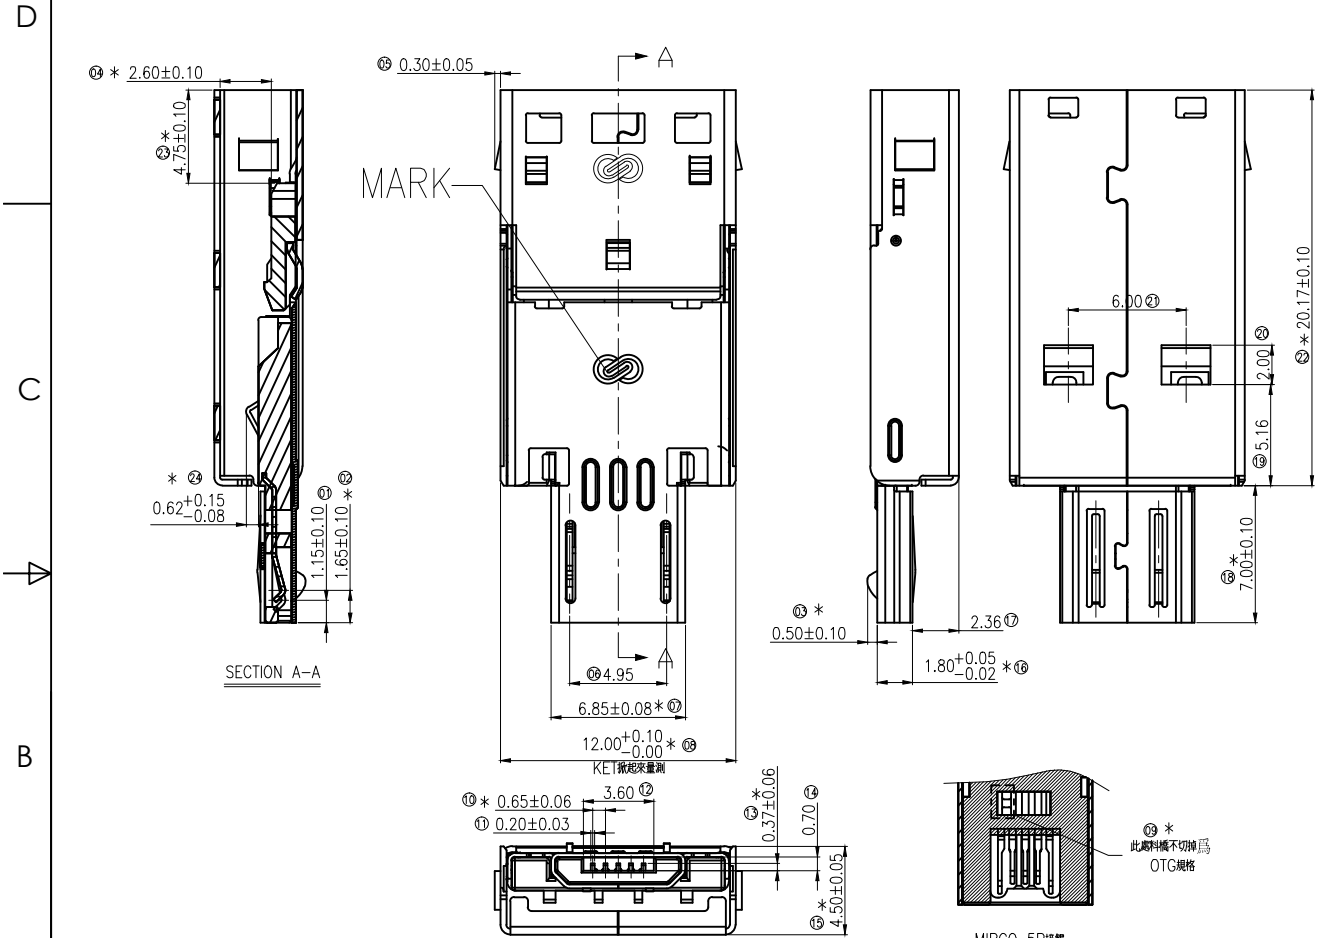


PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	ease for Manufacture Initial Rel	BILL	11/21/14
B	增加雾面料号	BILL	05/11/15



NOTES:

1, MATERIAL:
 KET HOUSING: PBT, UL94 V-0, COLOR: SEE TABLE
 TAP HOUSING: PA66 UL94 V-0, COLOR: SEE TABLE
 CONTACT: C5210R-EH T=0.20±0.01mm
 SHELL: STAINLESS 430 T=0.30±0.01mm
 LATCH: SUS301 T=0.30±0.01mm
 KET SHELL: SUS301 T=0.20±0.01mm

2, PLATING:
 SHELL: 50" NICKEL ON THE ALL SURFACE.
 CONTACT: 50U" MIN NICKEL UNDERPLATING GOLD PLATED IN THE CONTACT.
 SPECIFICATION: a, G/F; b, 15u"; c, 30u";

3, ELECTRICAL SPECIFICATION:
 CONTACT CURRENT RATING: 1.8A FOR POWER AND GND CONTACTS.
 1A FOR SIGNAL CONTACTS.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 100 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC.

4, MECHANICAL CHARACTERISTICS:
 INSERTION FORCE: 3.57kg.(35N) MAX
 EXTRACTION FORCE: 0.8kg.(8N) MIN
 DURABILITY: 5000 CYCLES MIN

5, OPERATING TEMPERATURE: -30°C ~ +85°C

6, MARK "*" MUST BE QUALITY CONTROL.

TABLE:

PART NO	PLATING	COLOR	KET MARK	铁壳
002-01-08094	G/F	Black	WITH MARK	雾面
002-01-08054	G/F	Black	WITH MARK	亮面

APPROVALS		DATE	TITLE:		
DRAWN	BILL	05/11/15	UDP 3.0 15MM TYPE(卡勾款)		
CHECKED			SIZE	SCALE :	DRAWING NO.
APPROVALS			mm	1 : 1	000981
			REV.	SHEET 1 OF 1	
			B		

NO DESCRIPTION QTY UNIT DO NOT SCALE DRAWING ID NO XXXXXXXXXX SHEET 1 OF 1