
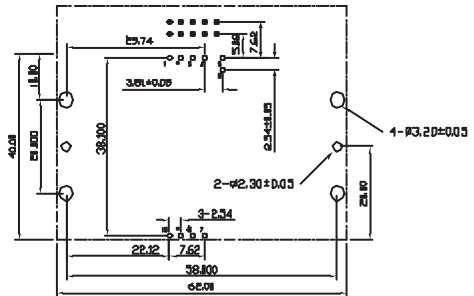

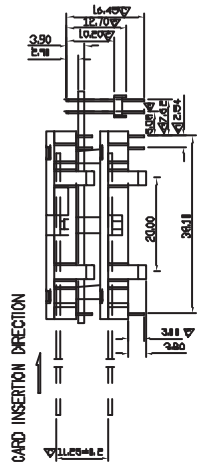
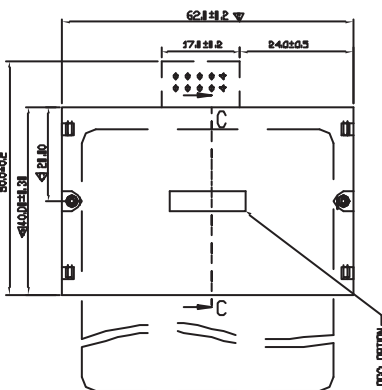


1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW

F
E
D
C
B
A

F
E
D
C
B
A

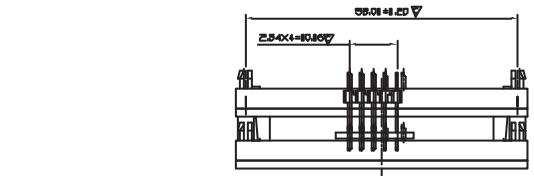


RECOMMENDED PCB LAYOUT

NOTE:
 1. CARD INSERTION SPECIFICATION
 A. CARD INSERTION DEPTH: 35.3 MM.
 B. CARD THICKNESS: 0.7-0.8 MM.
 2. READING CONTACT:
 POSITION: ACCORDING TO
 ISO 078°6-2 C1-C8,
 CONTACT FORCE: 30-50 GRAM.
 3. MATERIAL AND FINISH:
 A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
 B. CONTACT: PHOSPHOR BRONZE. SELECTIVE PLATING AU OVER 50μ" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.
 C. SWITCH: PHOSPHOR BRONZE. SELECTIVE PLATING AU OVER 50μ" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.
 ▽ CRITICAL DIMENSION

ORDER INFORMATION:
 SMCRR-418*ORLD X -G
 Switch Contact Type:
 1-Normal Open
 2-Normal Close



SEC. C-C

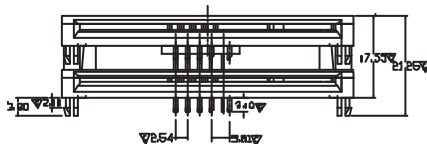

1) Normal Open



2) Normal Close

DIMENSION IN mm [Inch]		PROD. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.
.X±D.30	X.'± 2'	APPROVE
.XX±D.20	.X'± 1'	CHECK
.XXX±D.10	.XX'±	DRAW

ALMITA CO., LTD.		
TITLE	SMART CARD CONN. SPOON TYPE	CUSTOMER DRAWING
FILE NO.	DWG NO. SMCRR-41810BLOX-G	
SIZE	A4	PROJ. SHEET 1 / 1
SCALE	1:1	REV A

1 2 3 4 5 6 7 8 8F-01-R10