

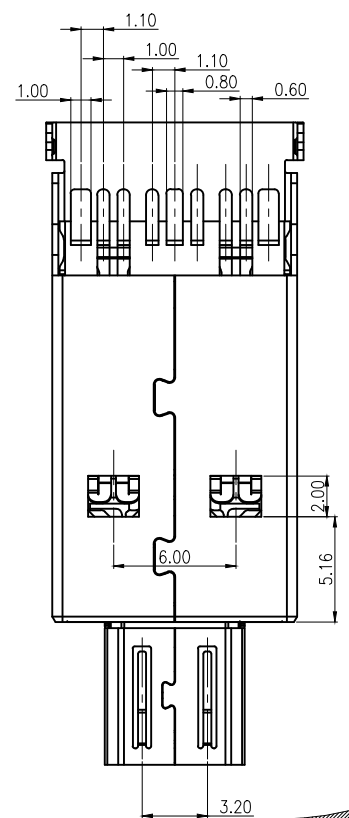
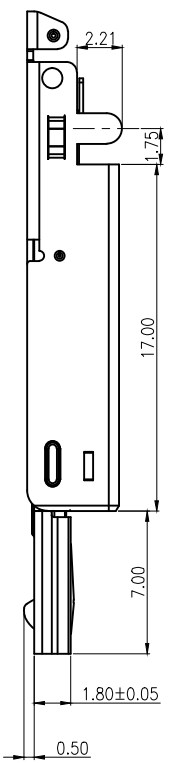
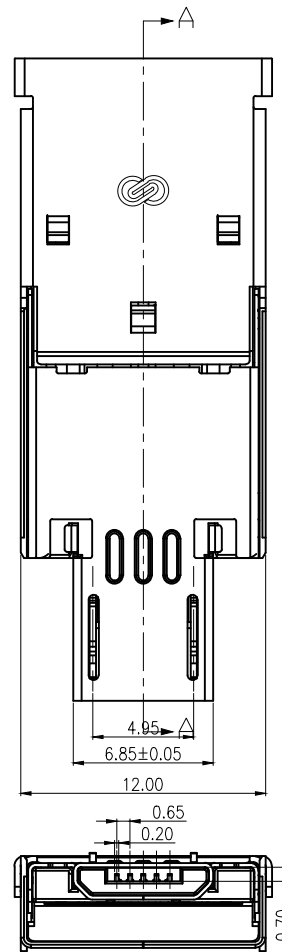


PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	ease for Manufacture Initial Rel	BILL	07/02'/13
B	更改为卡勾结构	BILL	03/04/15


D
C
B
A

D
C
B
A

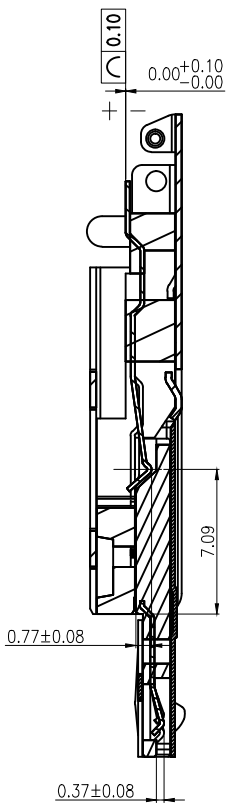

MIRCO 5P接插
靜位前面圖

此處料機切掉為
非OTG規格

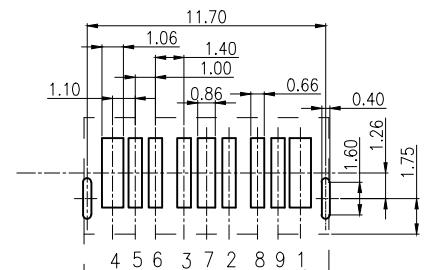

PCB THINNESS=1.0mm
LAYOUT(TOL:±0.02)

- NOTES:
- MATERIAL:
HOUSING:HIGH TEMPERATURE THERMOPLASTIC,UL94 V-0,
COLOR:SEE TABLE
CONTACT:PHOSPHOR BRONZE T=0.20±0.01mm
SHELL:SPCC T=0.30±0.01mm
KET SHELL:SUS 301 T=0.2±0.01mm
 - PLATING:
SHELL: OVER 50u" MIN CU UNDERPLATE:
50" NICKEL ON THE ALL SURFACE.
CONTACT:100u"MIN MISTY TIN PLATING ON SOLDER TAILS
GOLD PLATED ON THE CONTACT AREA
50u"MIN NICKEL UNDERPLATING .
GOLD SPECIFICATION:a,G/F; b, 15u"; c, 30u";
 - ELECTRONICAL SPECIFICATION:
CONTACT CURRENT RATING:1.8A FOR VBUS AND GND CONTACTS.
0.25A FOR ALL OTHERS CONTACTS.
CONTACT RESISTANCE:30 MILLIOHMS MAX.
INSULATION RESISTANCE:100 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:100V AC.
 - MECHANICAL CHARACTERISTICS:
INSERTION FORCE:3.57kg.(35N) MAX
EXTRACTION FORCE:1.02kg.(10N) MIN
DURABILITY:5000 CYCLES MIN
 - OPERATING TEMPERATURE:-40°C~+85°C

TABLE

PART NO	PLATING	COLOR
002-01-07993	G/F 30U"	LCP Black
002-01-07992	G/F 15U"	
002-01-07991	G/F G/F	

DIMENSION ARE
MILLIMETERS
TOLERANCES ARE :
DECIMALS
.X ± 0.25
.XX ± 0.20
ANGLE:
X ± 3°

APPROVALS		DATE
DRAWN	BILL	03/04/15
CHECKED		
APPROVALS		

TITLE: Universal Multi-Function Plug SMT Type B			
SIZE mm	SCALE : 1 : 1	DRAWING NO. 000954	REV. B

NO	DESCRIPTION	QTY	UNIT	DO NOT SCALE DRAWING	ID NO	SHEET	1 OF 3
					XXXXXXXXXX		

4 3 2 1