



PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	ease for Manufacture Initial Rel	BILL	07/02/13
B	更改塑膠材質由LCP改為PBT	BILL	10/07/14
C	更改卡勾結構	BILL	03/04/15

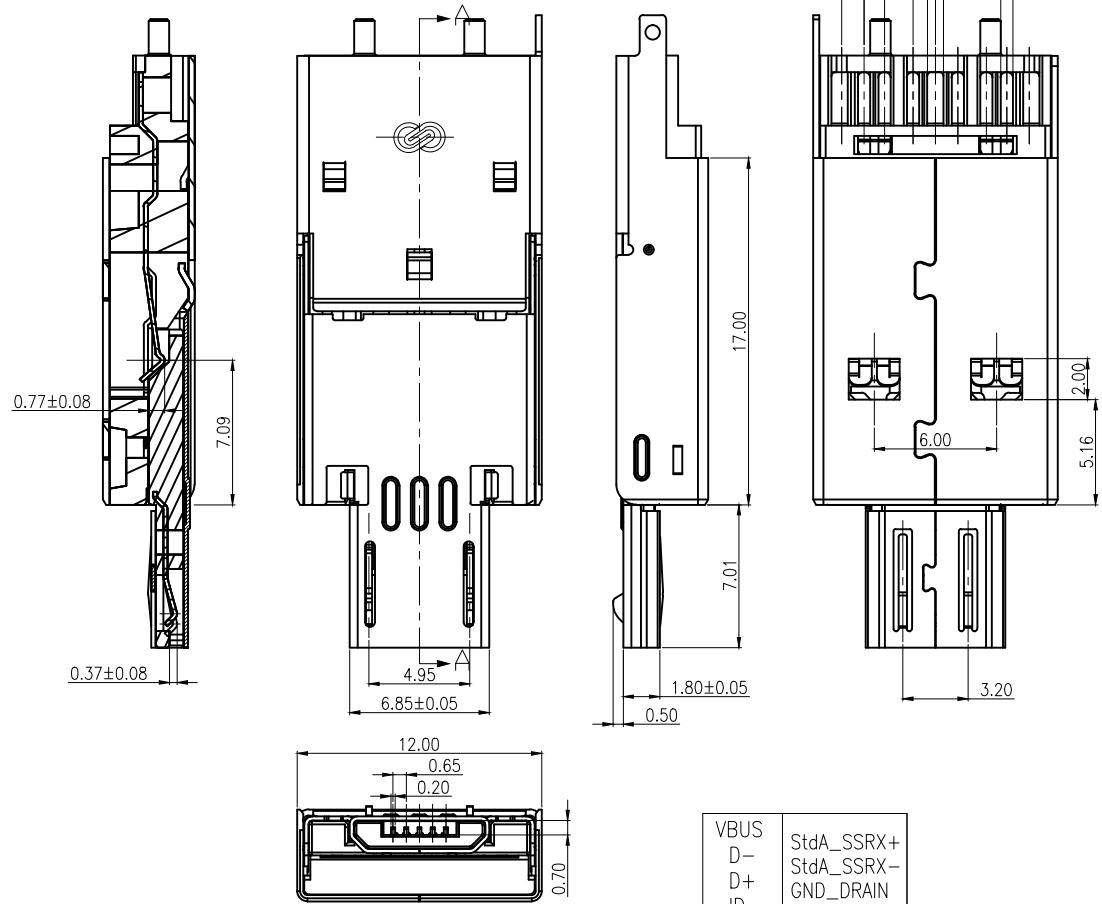

此處料橋不切掉為 OTG規格

NOTES:
 1.MATERIAL:
 HOUSING:HIGH TEMPERATURE THERMOPLASTIC,UL94 V-0,
 COLOR:SEE TABLE
 CONTACT:PHOSPHOR BRONZE T=0.20±0.01mm
 SHELL:SPCC T=0.30±0.01mm
 KET SHELL:SUS 301 T=0.2±0.01mm
 2.PLATING:
 SHELL: OVER 50u" MIN CU UNDERPLATE:
 50" NICKEL ON THE ALL SURFACE.
 CONTACT:100U"MIN MISTY TIN PLATING ON SOLDER TAILS
 GOLD PLATED ON THE CONTACT AREA
 50U"MIN NICKEL UNDERPLATING .
 GOLD SPECIFICATION:a,c,F; b, 15u"; c, 30u";
 3.ELECTRONICAL SPECIFICATION:
 CONTACT CURRENT RATING:1.8A FOR VBUS AND GND CONTACTS.
 0.25A FOR ALL OTHERS CONTACTS.
 CONTACT RESISTANCE:30 MILLIOHMS MAX.
 INSULATION RESISTANCE:100 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE:100V AC.
 4.MECHANICAL CHARACTERISTICS:
 INSERTION FORCE:3.57kg.(35N) MAX
 EXTRACTION FORCE:1.02kg.(10N) MIN
 DURABILITY:5000 CYCLES MIN
 5.OPERATING TEMPERATURE:-40°C~+85°C

VBUS	StdA_SSRX+
D-	StdA_SSRX-
D+	GND_DRAIN
ID	StdA_SSTX-
GND	StdA_SSTX+

TABLE

PART NO	PLATING	COLOR
002-01-08023	G/F	30U"
002-01-08022	G/F	15U"
002-01-08021	G/F	G/F

DIMENSION ARE MILLIMETERS
 TOLERANCES ARE :
 DECIMALS
 .X ± 0.25
 .XX ± 0.20
 ANGLE:
 X ± 3°

APPROVALS		DATE
DRAWN	BILL	03/04/15
CHECKED		
APPROVALS		

TITLE: Universal Multi-Function Plug SOLDER Type B (Support OTG)			
SIZE	SCALE :	DRAWING NO.	REV.
mm	1 : 1	000962	C

NO	DESCRIPTION	QTY	UNIT	DO NOT SCALE DRAWING	ID NO	SHEET	1 OF 3
----	-------------	-----	------	----------------------	-------	-------	--------